



# VAF SERIES SPIN-ON FILTER HEADS



## VE-10 SERIES SPIN-ON FILTER ELEMENTS

### VAF Heads:

Flows Up To: 32 GPM (Return) 14 GPM (Suction)  
 Port Size: 1" NPTF  
 Pressure: 250 PSI Max. Operating  
 Temperature: Up to +250°F Operating  
 Applications: Petroleum-based fluids.  
 Consult factory for synthetic fluids.

### VE-10:

Mounting Thread: 1 1/8" - 16  
 $\Delta P_{max}$ : 50 PSID  
 Efficiency:  $\beta < 4\mu(c) = 2 / \beta 19\mu(c) = 75$   
 Can Color / Imprint: White / Red  
 Seals: Buna-N Gasket Standard  
 Caution: Do not use VE Elements on  
 internal combustion engines.

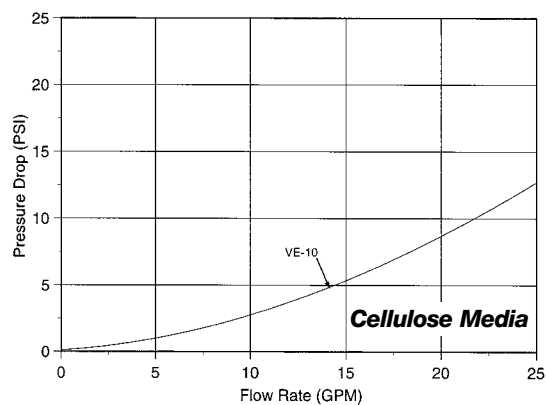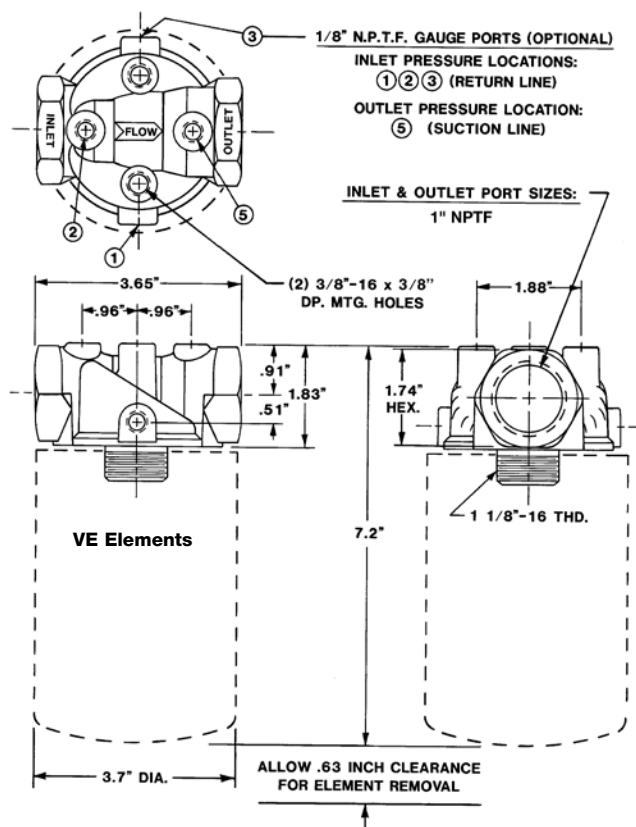

**Average Pressure Drop Through Clean Filter Assembly  
 With 150 SUS Oil At 105° F.**

**Consult Manufacturer for Ordering Information**