


## CM-05-15 Manifold Cartridge Filter

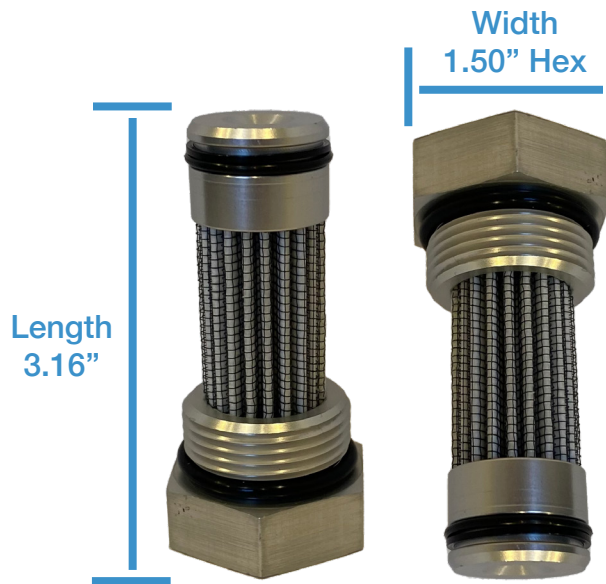

- SAE-16 Modified Design
- 5 GPM Flow Capacity
- 15 Micron Z-Glass Media
- 3000 PSI/207 Bar Housing Pressure Rating
- 290 PSID/20 bar Element Performance Rating
- -22°F to +250°F Max. Temperature
- Direct Replacement for Hydac CF20 Series

\*Compatible with all hydrocarbon based, synthetic, water glycol, oil/water emulsion, and high water-based fluids when the appropriate seals are selected.